

CCTV Catalog



IPC-4300H
45471 MT

HIK-VISION CAMERA TESTER IPC-4300H (O-STD) Camera Tester For Analog&IP camera Support 4K



DS-7608NI-K1/8P
11763 MT

80Mbps Bit Rate Input Max (up to 8-ch IP video), 2 SATA interfaces, 8 independent PoE network interfaces, 380 1U case, alarm I/O: 4/1(optional)



DS-7616NI-K2/16P
18906 MT

160Mbps Bit Rate Input Max (up to 16-ch IP video), 2 SATA interfaces, 16 independent PoE network interfaces, 380 1U case, alarm I/O: 4/1(optional)



DS-7732NI-K4/16P (AVAILABLE)
46667 MT

HIK VISION DS-7732NI-K4/16P NVR PRO SERIES, EasyIP 3.0 Series NVR, 8 CH @ 1080P, 32 CHANNEL / 16 CHANNEL POE, 256Mbps Bit Rate Input Max(up to 32-ch IP video), 4 SATA Interfaces, 16 independent PoE network interfaces, alarm I/O: 16/4, 1.5U case, 19"



DS-7616NXI-I2 / 16P / S
42958 MT

HIK-VISION DS-7616NXI-I2 / 16P / S NVR PRO SERIES EasyIP 4.0 Series AcuSense NVR, 16-CH@1080P, 16 CHANNEL POE, 4-ch false alarm reduction through human and vehicle target classification based on deep learning Up to 1-ch video stream face recognition based on deep learning algorithm Up to 16 face databases with 10,000 face images in total Up to 16-ch @ 1080p decoding capacity 1 HDMI and 1 VGA interfaces: both interfaces



DS-7732NXI-I4 / 16P / S
66411 MT

HIK-VISION DS-7732NXI-I4/16P/S NVR PRO SERIES EasyIP 4.0 Series AcuSense NVR, 16-ch@1080p, 32 CHANNEL / 16 CHANNEL POE, 4-ch false alarm reduction through human and vehicle target classification based on deep learning Up to 1-ch video stream face recognition based on deep learning algorithm Up to 16 face databases with 10,000 face images in total Up to 16-ch @ 1080p decoding capacity 1 HDMI and 1 VGA interfaces: both interfaces support independent video output Up to 12 MP high-definition live view, storage and playback 4 HDDs for continuous video recording

support independent video output
Up to 12 MP high-definition live
view, storage and playback 2 HDDs
for continuous video recording



DS-6700NI-S

9932 MT

HIK VISION DS-6700NI-S PRO
CONNECT BOX Up to 8-ch cloud
storage



DS-2CD2022WD-I

8890 MT

2MP 1/3" Progressive CMOS, ICR,
Olux with IR, 2688x1520: 20fps,
4mm/F2.0 lens (6mm optional),
H.264+/H.264/MJPEG, VCA
functions, 3 streams, IP67, DC12V &
PoE, 120dB WDR, 3D DNR, BLC, IR
range: up to 30m, Full metallic
housing, HIK-Connect cloud
service, 4MP, IR Mini Bullet, All-
metal, 4/6mm Fixed lens, Line
crossing detection, Intrusion
detection, Unattended baggage
detection, Object removal
detection, Face detection



DS-2CD2742FWD-I

19250 MT

4MP 1/3" Progressive CMOS, ICR,
Olux with IR, 2688x1520: 20fps,
2.8-12mm VF lens, IP67,
H.264+/H.264/MJPEG, VCA
functions; 3 streams, DC12V & PoE,
120dB WDR, 3D DNR, BLC, IR: up to
30m, support on-board storage up
to 128GB (SD card not included),
Vandal-proof housing, HIK-Connect
cloud service 4MP, VF IR Dome, All-
metal, 2.8-12mm VF lens, IK10, Line
crossing detection, Intrusion
detection, Unattended baggage
detection, Object removal
detection, Face detection



DS-2CD2T43G2-2I / 6MM

11787 MT

HIK-VISION DS-2CD2T43G2-2I



DS-2CD2043G2-I / 4MM /
4MP

10590 MT



DS-2CD2063G2-I / 6MM /
6MP

11787 MT

6MM, 4MP, EasyIP 2.0 Plus with AcuSense, IP67, 1/3" Progressive Scan CMOS;
 H.265+/H.265/H.264+/H.264/MJPEG;
 Color: 0.005 Lux @ (F1.6, AGC ON), 0 lux with IR; 25fps/30fps(2688x1520, 1920x1080); VCA functions; 3 streams; 3D DNR; BLC/HLC; ICR; DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service *-2I/4I model: up to 60m/80m IR distance

HIK-VISION DS-2CD2043G2-I 4MM, 4MP, NETWORK CAMERA, IP67, EasyIP 2.0 Plus with AcuSense, 1/3" Progressive Scan CMOS;
 H.265+/H.265/H.264+/H.264/MJPEG;
 Color: 0.005 Lux @ (F1.6, AGC ON), 0 lux with IR; 25fps/30fps(2688x1520, 1920x1080); VCA functions; 3 streams; 3D DNR; BLC/HLC; ICR; EXIR, up to 40m; DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service *-U:Built-in Microphone

HIK-VISION NETWORK CAMERA DS-2CD2063G2-I 6MM, 6MP EasyIP 2.0 Plus with AcuSense, IP67, 1/2.8" Progressive Scan CMOS;
 H.265+/H.265/H.264+/H.264/MJPEG;
 Color: 0.005 lux@(F1.6, AGC ON), 0 lux with IR; 20fps(3200x1800), 25fps/30fps (2688x1520, 1920x1080); VCA functions; 3 streams; 3D DNR; BLC/HLC; ICR; EXIR, up to 40m; DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service; *-U: built-in microphone



DS-2CD2083G2-IU / 6MM / 8MP

13402 MT

HIK-VISION DS-2CD2083G2-IU 6MM, 8MP, NETWORK CAMERA EasyIP 2.0 Plus with AcuSense, IP67, 1/2.8" Progressive Scan CMOS;
 H.265+/H.265/H.264+/H.264/MJPEG;
 Color: 0.005 lux@(F1.6, AGC ON), 0 lux with IR; 20fps(3840x2160), 25fps/30fps (3200x1800, 2688x1520, 1920x1080); VCA functions; 3 streams; 3D DNR; BLC/HLC; ICR; EXIR, up to 40m; DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service; *-U: built-in microphone



DS-2CD2143G2-I / 4MM / 4MP DOME

10590 MT

HIK-VISION DS-2CD2143G2-I 4MM, 4MP NETWORK CAMERA EasyIP 2.0 Plus with AcuSense, IK10, 1/3" Progressive Scan CMOS;
 H.265+/H.265/H.264+/H.264/MJPEG;
 Color: 0.005 Lux @ (F1.6, AGC ON), 0 lux with IR; 25fps/30fps(2688x1520, 1920x1080); VCA functions; 3 streams; 3D DNR; BLC/HLC; ICR; EXIR, up to 30m; DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service *-S model: Audio/Alarm IO



DS-2CD2347G3E-L / 2,8MM

9170 MT

HIK-VISION IP CAMERA 2,8MM COLORVU, 1/1.8" Progressive Scan CMOS;
 H.265+/H.265/H.264+/H.264/MJPEG;
 Color: 0.0014 lux @(F1.0, AGC ON), 0 lux with LED on; 25fps/24fps(2592x1520,2304x1296,1920x1080); VCA functions; 3 streams; 3D DNR; BLC; ICR; 3000K Warm LED; DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service



DS-2CD2347G2-L / 4MM
13881 MT

HIK-VISION DS-2CD2347G2-L/4MM
4MP IP CAMERA. 1/1.8" Progressive
Scan CMOS;
H.265+/H.265/H.264+/H.264/MJPEG;
Color: 0.0005 lux @(F1.0, AGC ON),
0 lux with LED on;
25fps/30fps(2688x1520, 2304x1296,
1920x1080); VCA functions; 3
streams; 3D DNR; BLC; ICR; 3000K
Warm LED; DC12V&PoE; Built-in
micro SD/SDHC/SDXC slot; HIK-
Connect cloud service; -U:Built-in
micphone



**DS-2CD2343G2-IU / 4MM -
4MP TURRET**
10291 MT

HIK-VISION DS-2CD2343G2-IU
4MM, 4MP, NETWORK CAMERA
EasyIP 2.0 Plus with AcuSense,
IP67, 1/3" Progressive Scan CMOS;
H.265+/H.265/H.264+/H.264/MJPEG;
Color: 0.005 Lux @ (F1.6, AGC ON), 0
lux with IR; 25fps/30fps(2688x1520,
1920x1080); VCA functions; 3
streams; 3D DNR; BLC/HLC; ICR;
EXIR, up to 30m; DC12V&PoE; Built-
in micro SD/SDHC/SDXC slot; HIK-
Connect cloud service *-U:Built-in
micphone



DS-2CD2047G2-L 6MM
12565 MT

HIK-VISION DS-2CD2047G2-L 6MM
EASY IP CAMERA 6MM COLORVU
4MP, 1/1.8" Progressive Scan CMOS;
H.265+/H.265/H.264+/H.264/MJPEG;
Color: 0.0005 lux @(F1.0, AGC ON),
0 lux with LED on;
25fps/30fps(2688x1520, 2304x1296,
1920x1080); VCA functions; 3
streams; 3D DNR; BLC; ICR; 3000K
Warm LED; DC12V&PoE; Built-in
micro SD/SDHC/SDXC slot; HIK-
Connect cloud service; -U:Built-in
micphone



DS-2CD2T47G2-L / 4MM
16394 MT

HIK-VISION DS-2CD2T47G2-L /
4MM / IP CAMERA 4MP COLORVU,
1/1.8" Progressive Scan CMOS;
H.265+/H.265/H.264+/H.264/MJPEG;
Color: 0.0014 lux @(F1.0, AGC ON), 0
lux with LED on;
25fps/30fps(2688x1520,2560x1440,1920x1080);
VCA functions; 3 streams; 3D DNR;



**DS-2CD2743G1-IZS /
2,8mm - 12mm**
14210 MT

HIK-VISION IP CAMERA 4MP, 1/3"
Progressive Scan CMOS; Motorized
Verifocal,
H.265+/H.265/H.264+/H.264/MJPEG;
Color: 0.018 Lux @ (F1.6, AGC ON), 0
lux with IR; 25fps/30fps(2688x1520,
1920x1080); VCA functions; 3
streams; 3D DNR; BLC/HLC; ICR;
EXIR, up to 30m; DC12V&PoE; Built-



**DS-2CD2935FWD-IS /
1,16MM**
14490 MT

HIK-VISION IP CAMERA 360°
fisheye lens, 1/2.8" Progressive Scan
CMOS;
H.265+/H.265/H.264+/H.264/MJPEG;
Color: 0.016 lux @(F2.2, AGC ON), 0
lux with IR; 25fps/30fps(2048x1536,
1920x1080); F2.2, field of view:
180°(H)x180°(V); 120dB WDR; 2
streams; 3D DNR; BLC; ICR; up to

BLC; ICR; 3000K Warm LED;
DC12V&PoE; Built-in micro
SD/SDHC/SDXC slot; HIK-Connect
cloud service

in micro SD/SDHC/SDXC slot; HIK-
Connect cloud service *-S model:
Audio/Alarm IO, Line crossing
detection, Intrusion detection Face
detection

10m IR(optional); DC12V&PoE; Built-
in micro SD/SDHC/SDXC slot; HIK-
Connect cloud service *-I model:
support IR, up to 20m *-S model:
Audio/Alarm I/O, Line crossing
detection, Intrusion detection,
Unattended baggage detection,
Object removal detection, Face
detection



DS-2CD2146G2-I 4MM

11607 MT

HIK-VISION DS-2CD2146G2-I 4MM
4MP PRO SERIES EasyIP 4.0 with
AcuSense, IP67, 1/3" Progressive
Scan CMOS(C model);
H.265+/H.265/H.264+/H.264/MJPEG;
Powered by Darkfighter
technology, Color: 0.003 lux @(F1.4,
AGC ON), 0 lux with IR;
25fps/30fps(2688x1520, 1920x1080);
VCA functions; 3 streams; 3D DNR;
BLC; ICR; EXIR; C12V&PoE; Built-in
micro SD/SDHC/SDXC slot; HIK-
Connect cloud service *-SU model:
Audio/Alarm I/O; built-in
microphone *-non-(C) model: 1/2.7"
Progressive Scan CMOS



DS-2CD2066G2-IU 4MM

13402 MT

HIK-VISION DS-2CD2066G2-IU
4MM 6MP EasyIP 4.0 with
AcuSense NETWORK CAMERA
Powered by Darkfighter, IP67, 1/2.4"
Progressive Scan CMOS;
H.265+/H.265/H.264+/H.264/MJPEG;
Powered by Darkfighter technology,
Color: 0.003 lux @(F1.6, AGC ON), 0
lux with IR; 25fps/30fps (3200x1800,
2688x1520, 1920x1080); VCA
functions; 3 streams; 3D DNR;
BLC/HLC; ICR; EXIR, up to 40m;
DC12V&PoE; Built-in micro
SD/SDHC/SDXC slot; HIK-Connect
cloud service; *-U: built-in
microphone



DS-2CD2046G2-IU 4MM

11847 MT

HIK-VISION DS-2CD2046G2-IU
4MM 4MP EASY IP 3.0 PRO SERIES
NETWORK CAMERA POWERED BY
DARKFIGHTER, IP67, 1/2.5"
Progressive Scan CMOS;
H.265+/H.265/H.264+/H.264/MJPEG;
Powered by Darkfighter technology,
Color: 0.014 lux @(F1.6, AGC ON), 0
lux with IR;
25fps/30fps(2688x1520, 2304x1296, 1920x1080)
VCA functions; 3 streams; 3D DNR;
BLC/HLC; ICR; EXIR, up to 30m;
DC12V&PoE; Built-in micro
SD/SDHC/SDXC slot; HIK-Connect
cloud service



DS-2CD2H43G2-IZS (2.8MM - 12MM) TURRET

18488 MT

HIK-VISION DS-2CD2H43G2-IZS (2.8MM - 12MM) 4MP NETWORK CAMERA EasyIP 2.0 Plus with AcuSense, IP67, 1/3" Progressive Scan CMOS;
H.265+/H.265/H.264+/H.264/MJPEG; Color: 0.005 Lux @ (F1.6, AGC ON), 0 lux with IR; 25fps/30fps(2688x1520, 1920x1080); VCA functions: 3 streams; 3D DNR; BLC/HLC; ICR; EXIR, up to 40m; Audio/Alarm IO; DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service



DS-2CD2666G2-IZS

24530 MT

HIK-VISION DS-2CD2666G2-IZS (2.8MM - 12MM) 6MP EasyIP 3.0 PRO SERIES NETWORK CAMERA, Powered by Darkfighter Motorized Lens, IP66, 1/2.4" Progressive Scan CMOS;
H.265+/H.265/H.264+/H.264/MJPEG; Powered by Darkfighter technology, Color: 0.012 Lux @ (F1.4, AGC ON), 0 lux with IR; 20fps(3072x2048), 25fps/30fps(2560x1440, 2048x1536, 1920x1080); VCA functions: 3 streams; 3D DNR; BLC/HLC; ICR; EXIR, up to 50m; All-metal housing, IP67; DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; Built-in Audio/Alarm I/O, HIK-Connect cloud service



DS-7104NI-K1/W/M

5206 MT

HIK-VISION WIRELESS NVR
50Mbps Bit Rate Input Max (up to 4-ch IP video), 1 SATA interface, standalone 1U case, H.265+/2.265/H.264+/H.264, 2 external antennas, transmission speed at up to 144Mbps



DS-7108NI-K1/W/M

6020 MT

HIK-VISION WIRELESS NVR
50Mbps Bit Rate Input Max (up to 8-ch IP video), 1 SATA interface, standalone 1U case, H.265+/2.265/H.264+/H.264, 2 external antennas, transmission speed at up to 144Mbps



DS-2CV2U21FD-IW / 2,0MM

3388 MT

HIK-VISION WIRELESS CAMERA
2MP 1/2.7" Progressive CMOS, ICR, 0lux with IR, 1920x1080: 25fps(P)/30fps(N), H.265+/H.265/H.264+/H.264/MJPEG, dual-stream, 3D DNR, support on-board storage up to 128GB(TF card)



DS-2CV2Q21FD-IW / 2MP 2,0MM

4069 MT

HIK-VISION WIRELESS CAMERA
2MP, 2,0MM, 1/2.7" Progressive CMOS, ICR, 0lux with IR, 1920x1080: 25fps(P)/30fps(N), H.265+/H.265/H.264+/H.264/MJPEG, dual-stream, 3D DNR, PT function (Pan: 0° ~ 355°; Tilt: -10° ~ 90°),

slot), HIK-Connect cloud service, Build-in microphone and speaker, support two-way audio. Built-in dual internal antenna 2.4G Wi-Fi, 5VDC power supply. *SD card is not included.



DS-2CD2121G1-IDW1 / 2,8MM

4847 MT

HIK-VISION WIRELESS CAMERA

2MP, 2,0MM, 1/2.8" Progressive

CMOS, ICR, 0lux with IR,

1920x1080/1280x720:

25fps(P)/30fps(N),

H.265+/H.265/H.264+/H.264/MJPEG,

dual-stream, 3D DNR, support on-

board storage up to 128GB(TF card

slot), HIK-Connect cloud service,

Build-in microphone. Wi-Fi

802.11b/g/n. 2-Axis Adjustment Wt:

less than 20dBm, less than 50m in

open area.



DS-2CV2027Go-LDW / 4MM

12565 MT

HIK-VISION DS-2CV2027Go-LDW

4MM WIRELESS CAMERA 2MP

COLOR-VU, 1/2.8" Progressive

CMOS, Color: 0.0005 lux @(F1.0,

AGC ON), 0 lux with LED on:

1920x1080/1280x720:

25fps(P)/30fps(N), 2.8/4mm lens,

.265/H.264+/H.264/MJPEG, dual-

stream, VCA(Line crossing

detection, Intrusion detection by

AcuSense human and vehicle

target classification), 3D DNR,

support on-board storage up to

256GB(TF card slot), Build-in

microphone and speaker. Dual-

Antenna Wi-Fi 802.11b/g/n. *power

supply included *cannot be directly

connected by Hik-Connect App in

wireless way

support on-board storage up to 128GB(TF card slot), HIK-Connect cloud service, Build-in microphone and speaker, support two-way audio. Built-in dual internal antenna 2.4G Wi-Fi, 5VDC power supply. *SD card is not included.



DS-7108HQHI-K1 1080P/4MP Lite

7945 MT

HIK-VISION DVR 8 Turbo

HD/AHD/Analog interface input, 8-

ch HDTV1 coaxial video&audio

input, 1-ch RCA audio input, 4-ch IP

video input(up to 12-ch IP),1 SATA

interface, H.265/H.265 Pro/H.265

Pro+ compression,

CH01&02:3MP@15fps, CH01-

08:1920x1080P/4MP Lite@15fps/ch,

mini 1U case W/RJ45 LAN

2MP
4MP Lite

16CH DVR
plus 8CH IP
1x SATA

HIKVISION
DS-7116HQHI-K1 TURBO HD DVR



DS-7116HQHI-K1
1080P/4MP Lite

13839 MT

HIK-VISION DVR16 Turbo
HD/AHD/Analog interface input, 16-
ch HDTV1 coaxial video&audio
input, 1-ch RCA audio input, 8-ch IP
video input(up to 24-ch IP),1 SATA
interface, H.265/H.265 Pro/H.265
Pro+ compression, CH01-04: 3MP @
15fps, CH01-16:1920x1080P/4MP
Lite@15 fps/ch, 4K UHD output,
mini 1U case W/RJ45 LAN



DS-7116HGHI-F1 OU DS-
7116GH1-F1

10231 MT

16 Turbo HD/Analog interface input,
16-ch video&1-ch audio input, 1 SATA
interface, 1280x720P: 25(P)/30(N)
fps/ch, mini 1U case



DS-7208HGHI-F1/N

4847 MT

8 Turbo HD/Analog interface input,
8-ch video&1-ch audio input, 1 SATA
interface, 1280x720P: 25(P)/30(N)
fps/ch, 260 1U case



DS-7216HGHI-F2

8556 MT

16 Turbo HD/Analog interface input,
16-ch video&1-ch audio input, 2
SATA interfaces, 1280x720P:
25(P)/30(N) fps/ch, 380 1U case



DS-7216HGHI-F1/N

8556 MT

16 Turbo HD/Analog interface input,
16-ch video&1-ch audio input, 2
SATA interfaces, 1280x720P:
25(P)/30(N) fps/ch, 380 1U case



DS-7208HQHI-F1/N

10530 MT

8 Turbo HD/Analog interface input,
8-ch video&1-ch audio input, 1 SATA
interface,1920x1080P: 10 fps/ch,
1280x720P: 25(P)/30(N) fps/ch,
support CVBS output, standalone 1U
case



DS-7216HQHI-F2/N

20582 MT

16 Turbo HD/Analog interface input,
16-ch video&1-ch audio input, 2
SATA interfaces,1920x1080P: 12
fps/ch, 1280x720P: 25(P)/30(N)
fps/ch, 4K UHD output, support
CVBS output, 380 1U case



DS-7208HUHI-F1/N

16095 MT

8 Turbo HD/Analog interface input,
8-ch video&4-ch audio input, 1 SATA
interface, 3MP: 15fps, 1920x1080P:
25(P)/30(N) fps/ch, 4K UHD output,
alarm I/O: 8/4, support CVBS
output, standalone 1U case



DS-7216HUHI-F2/N

32009 MT

16 Turbo HD/Analog interface input,
16-ch video&4-ch audio input, 2
SATA interfaces, 3MP: 15fps,
1920x1080P: 25(P)/30(N) fps/ch, 4K
UHD output, alarm I/O: 16/4,
support CVBS output, 380 1U case



DS-7324HGHI-SH

52889 MT

24 Turbo HD/Analog self-adaptive
interfaces input, 24-ch video&4-ch
audio input, 4 SATA interfaces,
1920x1080P: 12 fps/ch,
1280x720P:25(P)/30(N) fps/ch,
alarm I/O: 16/4, 1.5U 19" case



DS-7332HGHI-SH

62522 MT

32 Turbo HD/Analog self-adaptive
interfaces input, 32-ch video&4-ch
audio input, 4 SATA interfaces,
1920x1080P: 12 fps/ch,
1280x720P:25(P)/30(N) fps/ch,
alarm I/O: 16/4, 1.5U 19" case



DS-7232HGHI-K2 HD1080P Lite

20103 MT

HIK-VISION DVR 32 Turbo
HD/AHD/Analog interface input, 32-
ch video&1-ch audio input, 2-ch IP
video input, HDMI & VGA Output, 2
SATA interface, HD1080P Lite:
15fps/ch, 380 1U case W/RJ45 LAN



DS-1002KI

7916 MT

standard keyboard (2 dimensional)



DS-1003KI

11553 MT

standard keyboard (3 dimensional)



DS-1H05- T

3290 MT

Support 1080P HD IP video transmit over coaxial cable, 500Meter Transmission, IP & Analog, RJ45 Interface & BNC



DS-1H05- R

3290 MT

Support 1080P HD IP video receiver over coaxial cable, 500Meter reception, IP & Analog, RJ45 Interface & BNC



DS-2CC12A1P-AVFIR3

6701 MT

Bullet Cam 700 TVL, 1/3" CCD, 40m IR Range, EXIR, Smart IR, 0.001 Lux / F1.2, 12 VDC, (2.8mm, 3.6mm, 6mm, 8mm, 12mm, Lens, Default: 3.6mm)



DS-2CE16A2P-IT5

3500 MT

Bullet Cam 700 TVL 8mm, 1/3" CCD, 80m IR Range, EXIR, Smart IR, 0.001 Lux / F1.2, 12 VDC, (3.6mm, 6mm, 8mm, 12mm, 16mm Lens, Default: 3.6mm)



DS-2CC12A2P-IT5 (EXIR)

4200 MT

Bullet Cam 700 TVL, 8MM, 1/3" CCD,



DS-1321HZ

1975 MT

Outdoor Housing, Total dimension: 113x143x452mm, Aluminium Alloy.



DS-2CC1281P-AVFIR3

6941 MT

HIK VISION CAMERA BULLET VF

80m IR Range, EXIR, Smart IR, 0.001 Lux / F1.2, 12 VDC, (3.6mm, 6mm, 8mm, 12mm, 16mm Lens, Default: 3.6mm)



DS-2AE4162-A (Indoor)

11966 MT

PTZ Indoor Cam PAL:
976(H)x582(V), 1/3" SONY Interline Transfer EXview HAD-II CCD, ICR, Color: 650TVL, 0.1Lux/ (F1.6 AGC ON), B/W: 700TVL, 0.01Lux/ (F1.6 AGC ON), Optical zoom: 12x, Focus: 3.8-45.6mm, Digital zoom: 16x, 3D DNR, Digital WDR, Pan Speed: 0.1° - 160°/s, Tilt Speed: 0.1° - 120°/s



DS-2CE16CoT-IT3

2940 MT

HD720p, 1MP CMOS Sensor, 1 pcs EXIR LED, 40m IR, Outdoor EXIR Bullet, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR, IP66, Wide operating temperature range (-40°-60°), 3.6mm Lens



DS-2CE16CoT-IRP

1233 MT

HD720p, 1MP CMOS Sensor, 24 pcs IR LEDs, 20m IR, Outdoor IR Bullet, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR, IP66, Wide operating temperature range (-40°-60°), 3.6mm Lens



DS-2CE56CoT-IRP

1233 MT

HD720p, 1MP CMOS Sensor, 12 pcs IR LEDs, 20m IR, Indoor IR Eyeball, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR, Wide operating temperature range (-40°-60°), 2.8mm Lens



DS-2CE16C2T-VFIR3

4847 MT

HD720p, 1MP CMOS Sensor, 42 pcs IR LEDs, 40m IR, Outdoor IR Vari-focal Bullet, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR, IP66, Wide operating temperature range (-40°-60°), 2.8-12mm Lens



DS-2CE56C2T-VFIR3

4847 MT

HD720p, 1MP CMOS Sensor, 42 pcs IR LEDs, 40m IR, Outdoor IR Vari-focal Eyeball, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR, IP66, Wide operating temperature range (-40°-60°), 2.8-12mm Lens



DS-2CE56DoT-IRP

2453 MT

HD1080p,2MP CMOS Sensor, 24 pcs LEDs, 20m IR, Indoor IR Eyeball, ICR, 0.1 Lux/F1.2, 12 VDC, Smart IR, DNR, 3.6mm Lens



DS-2CE16DoT-IT5

4129 MT

HD1080p,2MP CMOS Sensor, 4 pcs EXIR LEDs, 80m IR, Outdoor EXIR Bullet, ICR, 0.1 Lux/F1.2, 12 VDC, Smart IR, DNR, IP66,6mm Lens



DS-2CE16DoT-IRP

2633 MT

HD1080p,2MP CMOS Sensor, 24 pcs LEDs, 20m IR, Outdoor IR Bullet, ICR, 0.1 Lux/F1.2, 12 VDC, Smart IR, DNR, IP66, 3.6/6mm Lens



DS-2CE16D1T-VFIR3

6761 MT

HD1080p,2MP CMOS Sensor, 42 pcs IR LEDs, 40m IR, Outdoor IR Vari-focal Bullet, ICR, 0.1 Lux/F1.2, 12 VDC, Smart IR, DNR, OSD Menu(Up the Coax), IP66, 2.8-12mm Lens



DS-2CE56D1T-VFIR3

6761 MT

HD1080p,2MP CMOS Sensor, 42 pcs IR LEDs, 40m IR, Outdoor IR Vari-focal Eyeball, ICR, 0.1 Lux/F1.2, 12 VDC, Smart IR, DNR, OSD Menu(Up the Coax), IP66, 2.8-12mm Lens



DS-2CE56F7T-VPIT

5744 MT

3MP,3MP CMOS Sensor, 18fps at 1920*1536 resolution, EXIR, 40m IR, Outdoor EXIR Motorized Vari-focal Dome, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR, DNR, OSD Menu(Up the Coax), True WDR, IP66, Vandal Proof, 2.8-12mm Motorized Vari-focal Lens



DS-2CE16F7T-AIT3Z

10530 MT

3MP,3MP CMOS Sensor, EXIR, 40m IR, Outdoor EXIR Motorized Vari-focal Bullet, ICR, 0.01 Lux/F1.2, 12VDC/ 24VAC, Smart IR, DNR, OSD Menu(Up the Coax), True WDR, IP66, 2.8-12mm Motorized Vari-focal Lens



DS-2CE56DoT-IPF

1232 MT

HIK-VISION CAMERA HD1080P IR Dome Camera, 2.0 Megapixel high-performance CMOS, Analog HD output, up to 1080P resolution, True Day/Night, Smart IR, Up to 20m IR distance, IP66 weatherproof, Switchable TVI/AHD/CVI/CVBS

DS-2CE16DoT-IPF

1377 MT

HIK-VISION CAMERA HD1080P IR Bullet Camera, 2.0 Megapixel high-performance CMOS, Analog HD output, up to 1080P resolution, True Day/Night, Smart IR, Up to 20m IR distance, IP66 weatherproof, Switchable TVI/AHD/CVI/CVBS



DS-2CE70DoT-ITMF 1080p

2154 MT

HIK-VISION CAMERA 2MP CMOS Sensor, 1080P@25fps(P) (Default)/30fps(N), EXIR, 20m IR, Outdoor EXIR Turret, ICR, 0.01 Lux/F1.2, 12VDC, Smart IR, DNR, OSD Menu(Up the Coax), IP67,2.8/3.6/6mm Lens□Support TVI/AHD/CVI/CVBS video signal output□Mini Size,black housing



DS-2CE17DoT-IT3F 1080p

2591 MT

HIK-VISION CAMERA 2MP CMOS Sensor, 1080P@25fps(P) (Default)/30fps(N), EXIR, 40m IR, Outdoor EXIR Turret, ICR, WDR, 0.01 Lux/F1.2, 12VDC, Smart IR, DNR, OSD Menu(Up the Coax), IP67,6mm Lens□Support TVI/AHD/CVI/CVBS video signal outp



DS-2CE10DF3T-PF

2730 MT

HIK-VISION 2 MP ColorVu Fixed Mini Bullet Camera High quality imaging with 2 MP, 1920 x 1080 resolution, 24/7 color imaging with F1.0 aperture, Clear imaging against strong back light , due to 130 dB true WDR technology, 3D DNR technology delivers clean and sharp images, 3.6 mm fixed focal lens, Up to 20 m white light distance for bright night imaging, One port for switchable signals (TVI/AHD/CVI/CVBS), Water and dust resistant (IP67).



DS-2CE17DoT-IT5
2940 MT

HIK-VISION 2 MP Fixed Bullet Camera, High quality imaging with 2 MP, 1920 x 1080 resolution, 6 mm fixed focal lens, Up to 80 m IR distance for bright night imaging, Water and dust resistant (IP67)



DS-2CE72DF3T-F
3016 MT

HIK-VISION 2 MP ColorVu Fixed Turret Camera, High quality imaging with 2 MP, 1920 x 1080 resolution, 24/7 color imaging with F1.0 aperture, Clear imaging against strong back light due to 130 dB true WDR technology, 3D DNR technology delivers clean and sharp images, 3.6 mm fixed focal lens, Up to 40 m white light distance for bright night imaging, One port for four switchable signals, (TVI/AHD/CVI/CVBS) Water and dust resistant (IP67)



DS-2CE16DoT-VFIR3F
HD1080p
3650 MT

HIK-VISION BULLET CAMERA 2MP CMOS Sensor, 42 pcs IR LEDs, 40m IR, Outdoor IR Vari-focal Bullet, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR, DNR, IP66, 2.8-12mm Lens, Support TVI/AHD/CVI/CVBS video signal output



DS-J142I/7108HQHI-K1+4+4CAM
21000 MT

HIK-VISION KIT WITH DVR - DS-7108HQHI-K1, CAMERAS 4 * DS-2CE16DoT-IRP(3.6mm) + 4 * DS-2CE56DoT-IRP(3.6mm) + Power:1pcs Power cable /1pcs Power adaptor/ 1pcs Power transfer cable, Cable: 8 * 18.3m(60ft) Video and power cable, Warning label : 4 * 55mm*105mm "VIDEO SURVEILLANCE IN OPERATION" waring label



DS-J142I/7108HGHI-F1/N+4+4CAM
15400 MT

HIK-VISION KIT WITH DVR - DS-7108HGHI-F1/N, CAMERAS 4 * DS-2CE16CoT-IRP(3.6mm) + 4 * DS-2CE56CoT-IRP(3.6mm) + Power:1pcs Power cable /1pcs Power adaptor/ 1pcs Power transfer cable, Cable: 8 * 18.3m(60ft) Video and power cable, Warning label : 4 * 55mm*105mm "VIDEO SURVEILLANCE IN OPERATION" waring label



DS-KIS202
5391 MT

HIK-VISION INTERCOM KIT Analog Kit Kit including DS-KB2411-IM and DS-KH2220 Include one monitor, one outdoor panel, 5-meter 4-wire cable, and other accessories



DS-KIS203T

10052 MT

HIK-VISION DS-KIS203T Video Intercom Products Water Proof Analog Kit 2MP camera, 7 inch LCD Kit including DS-KB2421T-IM and DS-KH2220 Include one monitor, one metal outdoor panel, 5-meter 4-wire cable, and other accessories It includes European power adapter.



DS-KIS602

22736 MT

HIK-VISION KIS602 Video Intercom, IP PRO KIT, IP video intercom kit for villa or house, only one call button. DS-KD8003-IME1/Surface x1; DS-KH6320-WTE1 x1; 4 port standard PoE switch x1; 16GB TF card x1; No need additional power supply.



DS-KIS605-P

14958 MT

HIK-VISION KIS605-P Video Intercom, IP video intercom kit for villa or house, only one call button. DS-KV6113-WPE1 x1; DS-KH6320-LE1 x1; PSU x2; It includes 2 European power adapters



TS8 8 CHANNEL CCTV TRANSMIT

1540 MT

8 CHANNEL CCTV TRANSMIT



TS16 16 CHANNEL CCTV TRANSMIT

4763 MT

16 CHANNEL CCTV TRANSMIT



CAB-TS TRANSMIT CABLE

140 MT

TRANSMIT CABLE



DS-3E0109P-E/M(B)



DS-3E0510P-E/M

4550 MT

HIK-VISION SWITCH L2,
Unmanaged, 8 10/100M RJ45 PoE
ports, 110/100M RJ45 uplink port,
802.3af/at, PoE power budget 60W,
max. 250m long distance
transmission, 6KV surgy protection

7000 MT

HIK-VISION SWITCH L2,
Unmanaged, 8 Gigabit POE ports, 1
Gigabit RJ45 uplink port, 1 Gigabit
SFP uplink port, 802.3af/at, PoE
power budget 58w



ST4000VX005

14630 MT

Seagate Skyhawk ST4000VX005
Surveillance 4TB Hard Drive 3.5"
SATA 5900RPM, SATA 6Gb/s
Interface, NVR-ready design, Multi-
drive environment, Stream support
up to 64 cameras, Low power
consumption, Design for
surveillance



PCU CONNECTOR CCTV

48 MT

PCU CONNECTOR CCTV



DSA-12PFG-12 FEU 120100

406 MT

DC Power for camera 12v-1a



DS-2PA1201-WRD

700 MT

HIK-VISION DS-2PA1201-WRD(O-
STD) 12V-1A / 12W WATER PROOF
POWER ADAPTER



UPS 12V2A CCTV MINI
UPS 12V - 2A

2100 MT


CCTV MINI UPS 12V - 2A



PSC POWER SUPPLY
CCTV 12V-20A

2651 MT

POWER SUPPLY CCTV 12V-20A

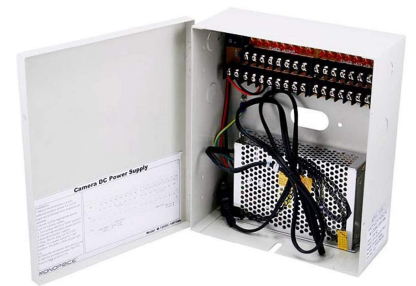

PVR 16CH CCTV 16CH
POWER SUPPLY

4344 MT

CCTV 16CH POWER SUPPLY



POWER SUPPLY 8
CHANNEL

1736 MT

HIK-VISION S-2FA1205-D8 Multi-
channel SMPS
12V/1A/ch,8ch,60W,European
standard



BALUN HIK-VISION S-
2FA1205-D8 Multi-
channel SMPS
12V/1A/ch,8ch,60W,European
standard

383 MT

BALUN CONNECTOR FOR CCTV
(SO YOU CAN USE NETWORK
CABLE INSTEAD OF COAXIAL) Best
quality



Stndsrt STAND
UNIVERSAL SIMPLE FOR
CAM

210 MT

STAND UNIVERSAL SIMPLE FOR
CAM



Sthdbig STAND



BNC BNC PINS FOR
CAMERA

30 MT

BNC PINS FOR CAMERA

STAND UNIVERSAL MEDIUM

231 MT

STAND UNIVERSAL MEDIUM



CF-3508 8 Channel Stand Alone DVR, H.264 Compression format, Multi Channel Syn. Usb 2.0 Port, Support Mouse operations, Sata HDD interface

4620 MT

8 Channel Stand Alone DVR, H.264 Compression format, Multi Channel Syn. Usb 2.0 Port, Support Mouse operations, Sata HDD interface, Max. 2TB HDD support capacity, Auto continued overwrite recording, high network transmission rate, low latency, support input & output alarm function, Support remote control. (Includes Remote Control & USB Mouse) - No HDD & Cameras are included



CF2051 HIGH RANGE 1/3" 3,6mm SONY CCD CAMERA INDOOR (NO IR LED), PAL / NTSC 1/60 FPS.

1610 MT

HIGH RANGE 1/3" 3,6mm SONY CCD CAMERA INDOOR (NO IR LED), PAL / NTSC 1/60 FPS.

UNIVERSAL BIG

301 MT

STAND UNIVERSAL BIG



CF2085H 1/3" SHARP CCD 8,0MM LENSE W/32 IR LED COVER UPTO 35 ~ 50M AREA, PAL / NTSC OUTDOOR NIGHT VISION CAMERA.

2520 MT

1/3" SHARP CCD 8,0MM LENSE W/32 IR LED COVER UPTO 35 - 50M AREA, PAL / NTSC OUTDOOR NIGHT VISION CAMERA.

420 TVL

1/3 Sony CCD



CF2086C 1/4" SONY CCD IR NIGHT VISION CAMERA, 12,0MM LENSE W/24 IR LED, HIGH QUALITY, PAL / NTSC 1/60 FPS.

2520 MT

1/4" SONY CCD IR NIGHT VISION CAMERA, 12,0MM LENSE W/24 IR LED, HIGH QUALITY, PAL / NTSC 1/60 FPS.



CF-2521 1. Adopt advanced DSP technic, higher image quality. 2. Auto electronic shutter, 3. Auto Gain Control 4. Backlight Compensation 5. Auto

white balance 6. 22X
Optical Zoom lens,10X
electrical zoom in,Auto
focus,OSD Menu 22X
ZOOM F=3.9-78.5mm

18200 MT

1. Adopt advanced DSP technic,
higher image quality. 2. Auto
electronic shutter, 3. Auto Gain
Control 4. Backlight Compensation
5. Auto white balance 6. 22X Optical
Zoom lens,10X electrical zoom
in,Auto focus,OSD Menu 22X ZOOM
F=3.9-78.5mm

Intelity, SA

Carlos Silva Street, 2, Alto Maé. P: (+258) 869 666 555 | 86 777 7780 Support: comercial@integrity.co.mz

[Download catalog in pdf file format](#)

We work with the following brands



EPSON
EXCEED YOUR VISION

TOSHIBA

brother
at your side



lenovo



Microsoft



kaspersky

TOTEN

legrand



Transcend

SONY

acer

SAMSUNG



Xprinter



ASUS



FUJITSU



logitech

HIKVISION

